


AMERICAN GLASS

MOSAICS

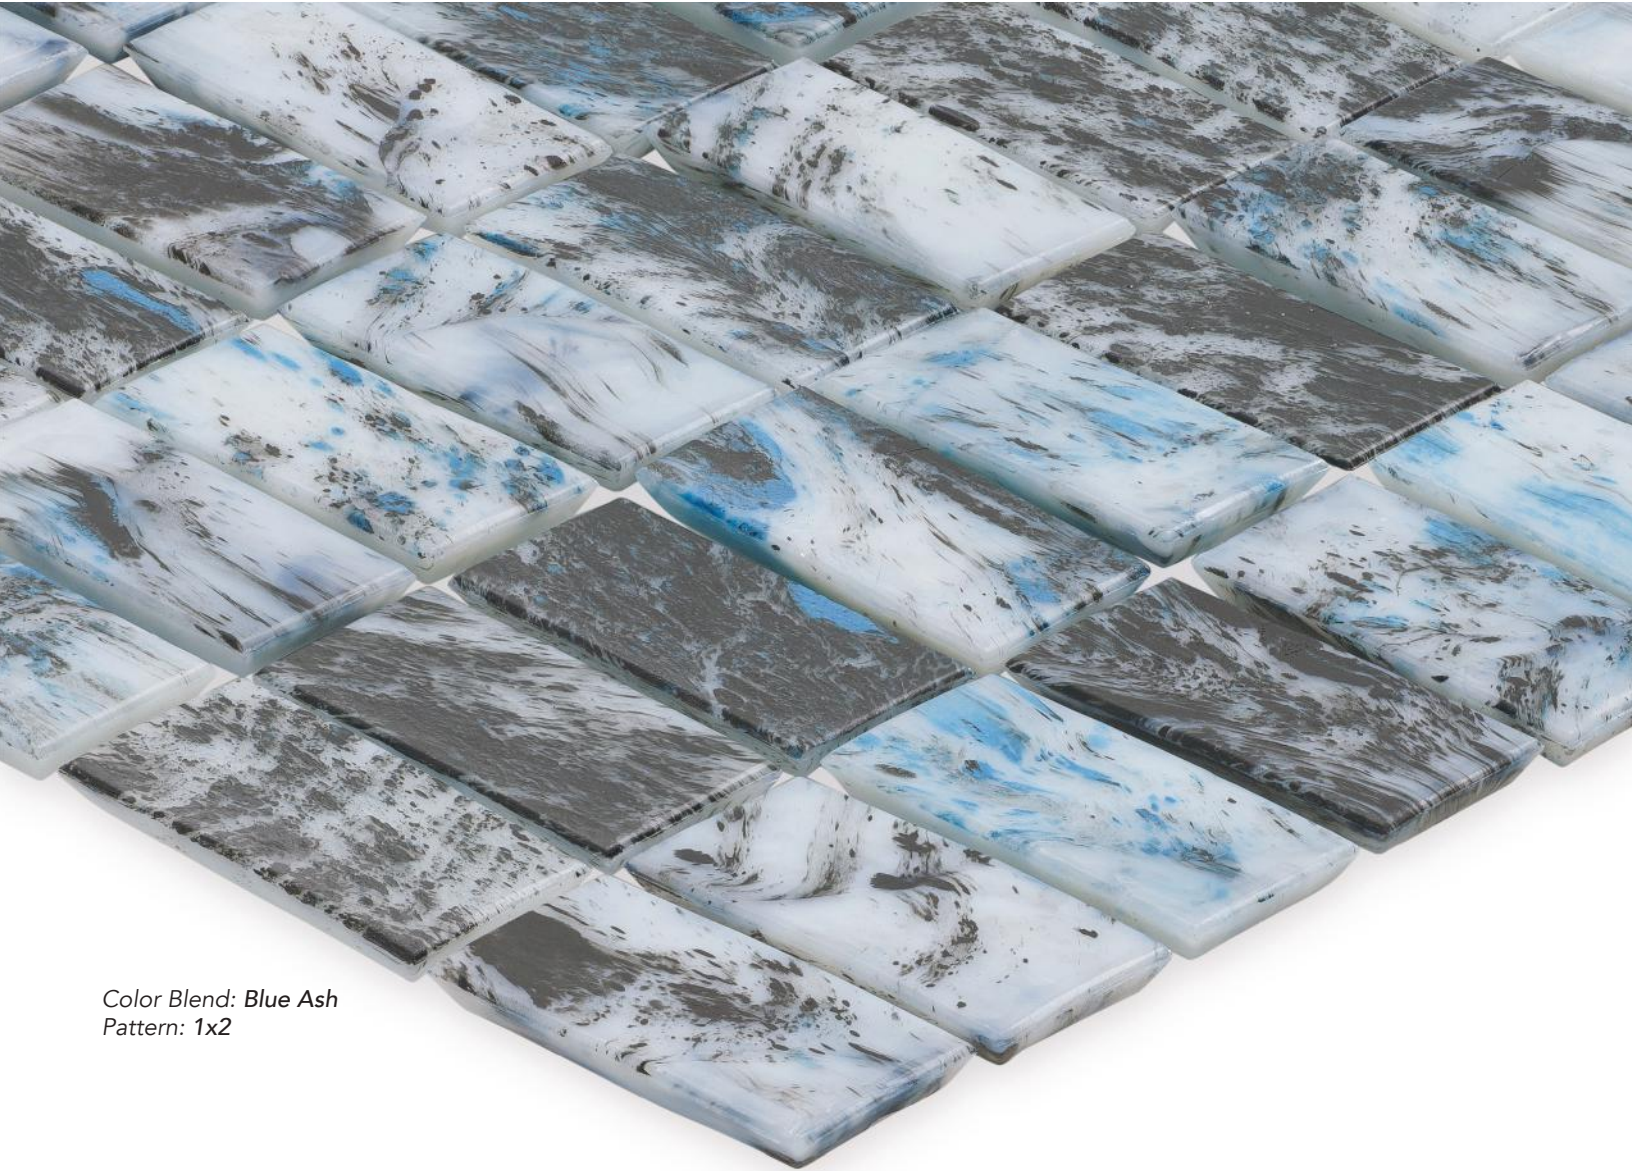

Color Blend: Blue Ash
Pattern: 1x2


ARCADIA COLLECTION



MARBLE TREND
EXTRAORDINARY SURFACES



BLUE ASH
E12.709.43 SB



BLUE ASH
E12.709.43 RB




AUTUMN WOOD
E12.786.03 SB




AUTUMN WOOD
E12.786.03 RB




SKY BLUE
E12.850.03 SB




SKY BLUE
E12.850.03 RB




MIDNIGHT
E12.853.03 SB




MIDNIGHT
E12.853.03 RB



PERSIAN BLUE
E12.871.03 SB




PERSIAN BLUE
E12.871.03 RB




PERRIWINKLE
E12.873.03 SB




PERRIWINKLE
E12.873.03 RB



ALICE BLUE
E12.875.03 SB




ALICE BLUE
E12.875.03 RB



ULTRAMARINE
E12.876.03 SB




ULTRAMARINE
E12.876.03 RB




STEEL BLUE
E12.880.03 SB



STEEL BLUE
E12.880.03 RB




FERN
E12.884.43 SB



FERN
E12.884.43 RB




WALNUT
E12.886.43 SB




WALNUT
E12.886.43 RB




CRIMSON
E12.902.03 SB




CRIMSON
E12.902.03 RB




1" x 1" (25 x 15 mm)




1" x 1" & 1" x 2"
Morse



1" x 2" (25 x 52 mm)
Eased Edge Stacked Bond



1" x 2" (25 x 52 mm)
Eased Edge Running Bond



1" x 2" (25 x 52 mm)
Herringbone

Manufactured to exceed the requirements of ANSI A137.2. Occasional variations in color, shade, tone and texture are to be expected in all glass products. Samples do not necessarily represent an exact match to existing inventory.

FINISH: Smalto Clear and Opaque.

TEST PERFORMED		SHADE VARIATION
ASTM C650-04 <i>Chemical Resistance</i>	No Effect	V2 - Slight Variation Clearly distinguishable differences in texture and/or pattern within similar colors. V3 - Moderate Variation While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.
ANSI A 137.2 <i>Thermal Shock Resistance</i>	No Defects	
ASTM C648 <i>Breaking Strength</i>	Passes	
ASTM C373 <i>Water Absorption</i>	Impervious	SUITABLE APPLICATIONS
ASTM C424 <i>Crazing Resistance</i>	Passes	Interior and exterior walls. Pools/spa/submerged. Freezing environments. Light traffic floor use.
ASTM C499 <i>Facial Dimension/Thickness</i>	Passes	MAINTENANCE
ASTM C485-09 <i>Warpage</i>	Passes	Standard household glass cleaner, or a neutral mild detergent with water.
ASTM C1026-13 <i>Freeze Thaw</i>	Passes	LEAD TIME
DCOF Acutest <i>Dynamic Coefficient of Friction</i>	.33 - .54	Normal lead time is 3-4 weeks or less. <i>Quick ship programs available.</i>